



## FOOD HOSES NETTUNO PU



### NETTUNO PU

**Colour:** clear with ivory spiral

**Temperature range:** -10°C + 60°C 14°F + 140°F

**Features:** PVC hose reinforced by antishock rigid PVC spiral. Inner PU layer abrasion resistant and food grade. Inside smooth, light, very flexible and strong, resists to fatigue, weather and most chemicals.


**Applications:** suction and delivery of alimentary products and liquids (including fatty foods) according to EC Directives and Regulations.\* Thanks to its PU layer is particularly suitable for transport of grains, animal feed, sugar and flour, whenever stronger abrasion resistance is needed.

**The antistatic version is available on request.**


**\*Please, contact our offices for more information.**

## Technical Data

Part Number	Inside Ø	Min. Wall Thickness	Max. Wall Thickness	Weight	Working Pressure	Bursting Pressure	Vacuum	Bending Radius	Roll Length	Volume
	mm	mm	mm	g/m	bar	bar	mH2O	mm	m	m <sup>3</sup>
NP 01 030.0 00C	30	2,8	3,3	360	5	15	7	150	30	0,089
NP 01 032.0 00C	31,8	2,9	3,4	390	5	15	7	155	30	0,099
NP 01 035.0 00C	35	3,0	3,5	440	5	15	7	170	30	0,108
NP 01 038.0 00C	38,1	3,1	3,7	520	5	15	7	185	30	0,116
NP 01 040.0 00C	40	3,1	3,8	550	5	15	7	195	30	0,134
NP 01 045.0 00C	45	3,1	4,1	670	5	15	7	215	30	0,158
NP 01 050.0 00C	50	3,3	4,5	800	5	15	7	235	30	0,199
NP 01 052.0 00C	50,8	3,3	4,5	810	5	15	7	235	30	0,201
NP 01 060.0 00C	60	3,4	4,6	970	5	15	7	275	30	0,251
NP 01 063.0 00C	63,5	3,5	4,6	1040	5	15	7	290	30	0,293
NP 01 065.0 00C	65	3,5	4,6	1110	5	15	7	290	30	0,300
NP 01 070.0 00C	70	3,7	4,9	1200	5	15	7	320	30	0,430
NP 01 076.0 00C	76,2	3,9	5,2	1380	5	15	7	340	30	0,480
NP 01 080.0 00C	80	4,1	5,5	1550	4	12	7	365	30	0,520
NP 01 090.0 00C	90	4,4	5,8	1850	4	12	7	420	30	0,598
NP 01 100.0 00C	100	4,7	6,3	2200	4	12	7	470	30	0,720
NP 01 102.0 00C	102	4,7	6,3	2250	4	12	7	470	30	0,733

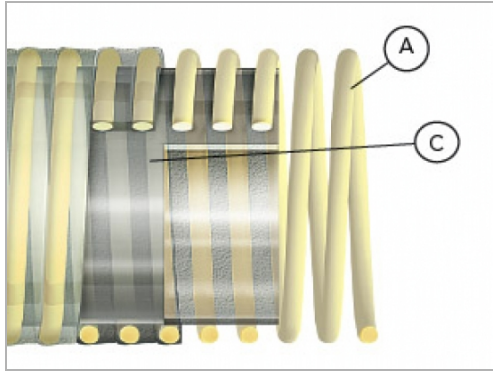

Antishock rigid PVC spiral

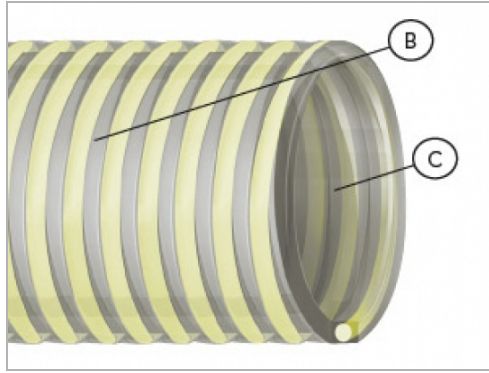

PVC wall (b) with inner ply food grad PU resistant to abrasion (c)