


FOOD HOSES GEMINI 2

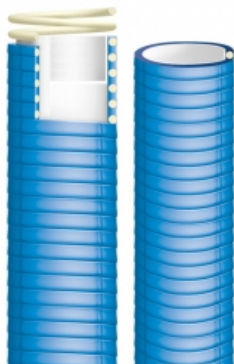

GEMINI 2

Colour: inside white, outside blue

Temperature range: -10°C + 60°C 14°F + 140°F

Features: PVC hose reinforced by antishock rigid PVC spiral. Inner PU layer abrasion resistant and food grade. Inside smooth, light, very flexible. Strong, resists to fatigue, weather and to most chemicals.


Applications: suction and delivery of alimentary products and liquids (including fatty foods) according to EC Directives and Regulations.* Stronger than netuno PU, thanks to its PU layer is suitable for transport of grain, animal feed, sugar and flour, whenever stronger abrasion resistance is needed. **Particularly suitable for transport of olive oil.**

The antistatic version is available on request.


*Please, contact our offices for more information.

Technical Data

Part Number	Inside Ø	Min. Wall Thickness	Max. Wall Thickness	Weight	Working Pressure	Bursting Pressure	Vacuum	Bending Radius	Roll Length	Volume
	mm	mm	mm	g/m	bar	bar	mH2O	mm	m	m ³
GE 01 030.0 000	30	3,5	4,1	500	5,0	15	10	120	50	0,155
GE 01 032.0 000	31,8	3,6	4,2	550	5,0	15	10	125	50	0,163
GE 01 040.0 000	40	3,9	4,6	730	5,0	15	10	160	50	0,208
GE 01 050.0 000	50	4,3	5,0	1000	4,0	12	9	200	50	0,312
GE 01 052.0 000	50,8	4,3	5,0	1010	4,0	12	9	200	50	0,316
GE 01 060.0 000	60	4,5	5,3	1250	4,0	12	9	240	50	0,462
GE 01 063.0 000	63,5	4,7	5,5	1400	4,0	12	9	260	50	0,504
GE 01 070.0 000	70	5,0	5,9	1600	3,0	9	9	280	50	0,605
GE 01 076.0 000	76	4,9	5,8	1700	3,0	9	9	310	50	0,647
GE 01 080.0 000	80	5,1	6,0	1850	3,0	9	9	320	50	0,721
GE 01 090.0 000	90	5,3	6,2	2150	3,0	9	9	360	30	0,620
GE 01 100.0 000	100	6,0	7,0	2700	3,0	9	8,5	410	30	0,770
GE 01 102.0 000	102	6,0	7,0	2750	3,0	9	8,5	410	30	0,782

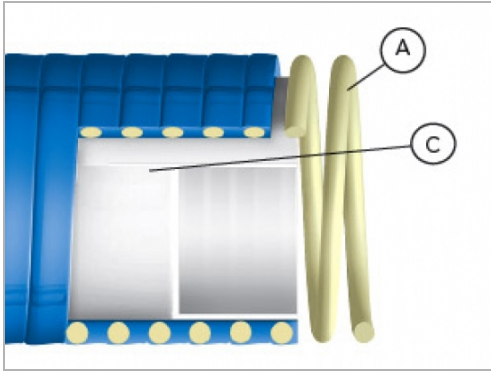

Antishock rigid PVC spiral

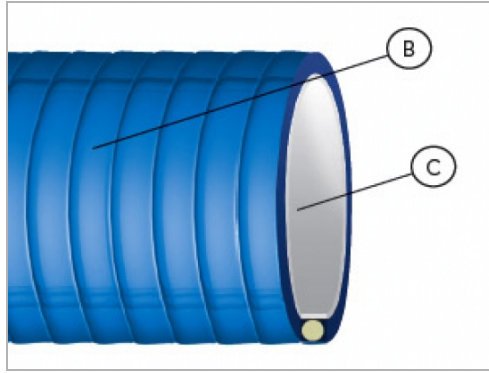

PVC wall (b) with inner ply of food grade PU resistant to abrasion (c)