

INDUSTRIAL CLEANING AND WASTE MANAGEMENT

APOLLO NL 1



APOLLO NL 1

Colour: green with dark grey spiral.

Temperature range: - 25° C + 60° C.


Features: Pvc hose reinforced with an anti-shock rigid Pvc spiral. **A particular structure with a corrugated surface which guarantees an easy dragging of the hose on the ground and an excellent strength/flexibility ratio.** Its particular formulation makes it the best choice at low temperatures. Resistant to crushing, abrasion, atmospheric agents and most chemicals.

Applications: excellent for suction in general, particularly suitable for applications on tank trucks, thanks to its particular structure and formulation features.


Can be manufactured antistatic upon request.

Technical Data

Part Number	Inside Ø	Min. Wall Thickness	Max Wall Thickness	Weight	Working Pressure	Bursting Pressure	Vacuum	Bending	Roll Length	Volume
	mm	mm	mm	g/m	bar	bar	m H2O	mm	m	m ³
A1 01 052	50,8	3,6	5,3	980	3,5	10,5	8	180	50	0,319
A1 01 065	65	4,2	5,9	1450	3	9	8	240	50	0,552
A1 01 076	76,2	4,2	6,2	1640	3	9	8	290	50	0,694
A1 01 102	102	4,9	7,7	2660	2	6	7	380	30	0,792
A1 01 127	127	5,2	8,2	3480	2	6	7	500	30	1,243
A1 01 152	152,4	6,1	9,4	4840	1,5	4,5	7	630	20	1,342

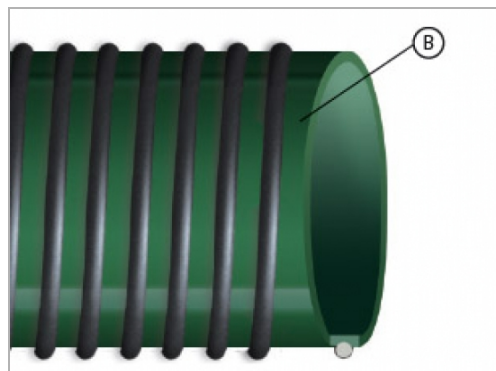

Anti-shock rigid PVC spiral

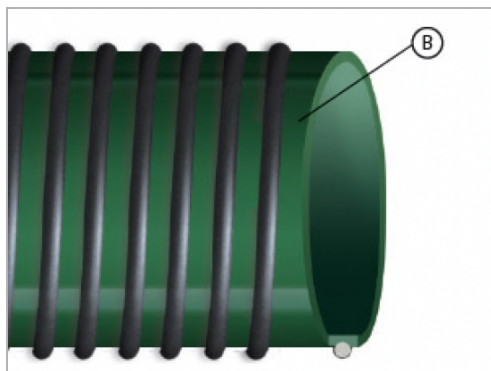

Superealistic PVC compound