

INDUSTRIAL CLEANING AND WASTE MANAGEMENT APOLLO SUPERFLEX



APOLLO SUPERFLEX

Colour: red with an extruded blue stripe.

Temperature range: -35° C + 50° C.


Features: Pvc hose reinforced with an anti-shock rigid Pvc spiral. **Special formulation, specific for very cold climates, which make it absolutely superior to the existing similar Pvc hoses normally used at low temperatures, for resistance and flexibility.**

Applications: excellent for suction in general, particularly suitable to be used on tank trucks thanks to the particular used resins.


It can be manufactured antistatic upon request.

Technical Data

Part number	Inside Ø	Min. Wall Thickness	Max Wall Thickness	Weight	Working Pressure	Bursting Pressure	Vacuum	Bending Radius	Roll Length	Volume
	mm	mm	mm	g/m	bar	bar	m H2O	mm	m	m ³
AS 01 025	25	3,4	3,8	410	3	15	8	80	50	0,094
AS 01 032	31,8	3,9	4,3	600	3	15	8	105	50	0,143
AS 01 038	38,1	3,9	4,4	700	2,6	13	8	125	50	0,190
AS 01 040	40	3,9	4,4	730	2,4	12	8	130	50	0,207
AS 01 050	50	4,3	4,9	1000	2	10	8	160	50	0,311
AS 01 052	50,8	4,3	4,9	1010	2	10	7	160	50	0,315
AS 01 063	63,5	4,7	5,4	1400	2	10	7	210	50	0,503
AS 01 076	76,2	5,0	5,7	1700	1,8	9	7	250	50	0,648
AS 01 100	100	6,0	7,0	2700	1,3	6,5	7	330	30	0,770
AS 01 102	102	6,0	7,0	2750	1,3	6,5	6	335	30	0,783
AS 01 105	105	5,9	7,0	2800	1,2	6	6	350	30	0,803
AS 01 127	127	6,3	7,4	3600	1,1	5,5	6	410	30	1,230
AS 01 150	151,5	7,3	8,6	5000	0,9	4,5	6	500	20	1,323

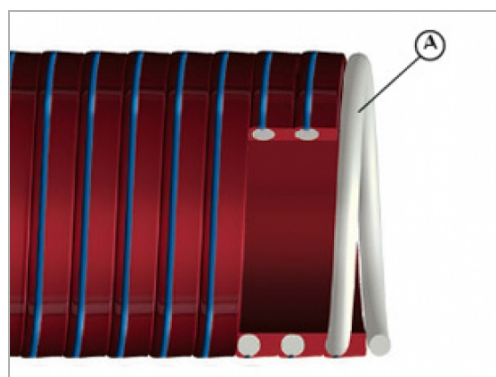

Anti-shok rigid PVC spiral

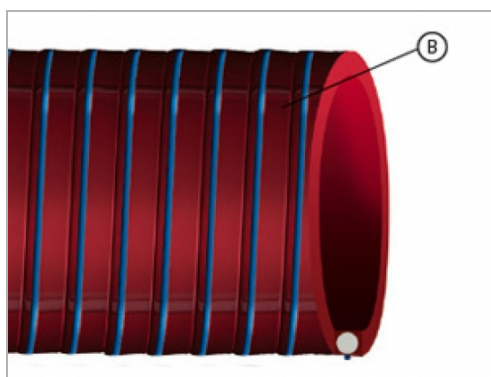

High flexibility PVC compound