

INDUSTRIAL CLEANING AND WASTE MANAGEMENT APOLLO SUPERFLEX 2



APOLLO SUPERFLEX 2

Colour: black with a grey helix.

Temperature range: - 40° C + 60° C.


Features: PVC/NBR hose reinforced with an anti-shock rigid Pvc spiral. Its particular mixed rubber nitrilic formulation gives it a high flexibility at extreme low temperatures. Its profile with a slightly protruding spiral guarantees an easy dragging on the ground and an easy and safe connection.

Applications: excellent for suction in general, particularly suitable to be used on tank trucks even at extreme low temperatures.


Can be manufactured antistatic upon request.

Technical Data

Part Number	Inside Ø	Min. Wall Thickness	Max. Wall Thickness	Weight	Working Pressure	Bursting Pressure	Vacuum	Bending	Roll Length	Volume
	mm	mm	mm	g/m	bar	bar	m H2O	mm	m	m ³
SF 01 052	50,8	4,4	4,9	1000	2	10	7	160	50	0,315
SF 01 063	63,5	4,9	5,5	1400	1,8	9	7	210	50	0,535
SF 01 076	76,2	5,1	5,8	1700	1,8	9	7	250	50	0,650
SF 01 080	80	5,1	6,4	1850	1,5	7,5	7	270	50	0,727
SF 01 090	90	5,2	6,6	2150	1,5	7,5	7	300	30	0,624
SF 01 102	102	5,9	7,2	2700	1,3	6,5	6	335	30	0,786
SF 01 110	110	6,1	7,5	3000	1,2	6	6	360	30	0,960
SF 01 127	127	6,3	7,8	3600	1,1	5,5	6	410	30	1,237
SF 01 152	152,4	7,4	9,0	5000	0,9	4,5	6	500	20	1,336

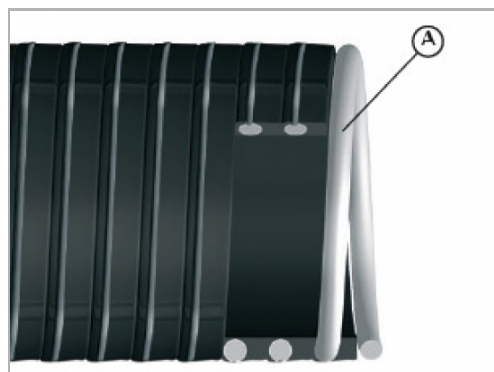

Anti-shock rigid PVC spiral

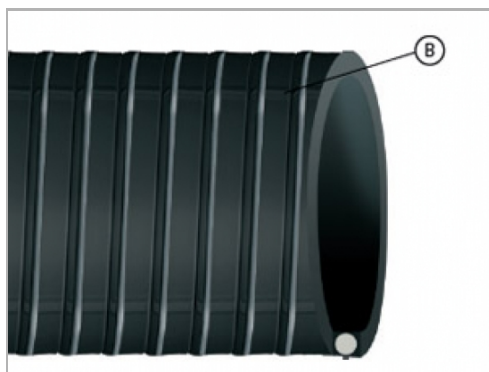

High flexibility PVC/NBR compound