


INDUSTRIAL CLEANING AND WASTE MANAGEMENT URANO PU

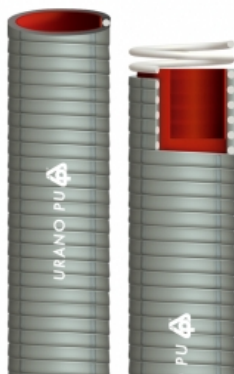

URANO PU

Colour: outside grey, inside red.

Temperature range: - 25°C + 60°C.


Features: Pvc hose with a completely antiabrasive Pu tube reinforced with an anti-shock rigid Pvc spiral. Inside surface smooth, outside semi rigid. **Its strong structure with the Pu layer makes it particularly suitable whenever heavy duty and very abrasive conditions are required.**

Applications: suction and discharge of abrasive liquids (slurry, sand, cement, pellets, gravel).


The hose can be manufactured (upon request) in the antistatic version, with a brassed steel wire inside the plastic wall, to meet still better the abrasion resistance requirements even on the external surface.

Technical Data

Part Number	Inside Ø	Min. Wall Thickness	Max. Wall Thickness	Weight	Working Pressure	Bursting Pressure	Vacuum	Bending	Roll Length	Volume
	mm	mm	mm	g/m	bar	bar	m H2O	mm	m	m ³
UR 01 076	76	4,9	5,8	1700	3,0	9	9	310	50	0,647
UR 01 102	102	6,0	7,0	2750	3,0	9	8,5	410	30	0,783
UR 01 127	127	6,3	7,4	3600	2,5	7,5	8	510	30	1,230
UR 01 152	152,4	7,3	8,6	5000	2,0	6	8	610	20	1,329

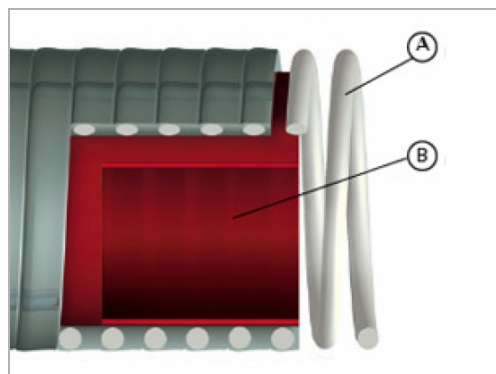

Anti-shock rigid PVC spiral
PU antiabrasion innerlayer, resistant to microbes and hydrolysis

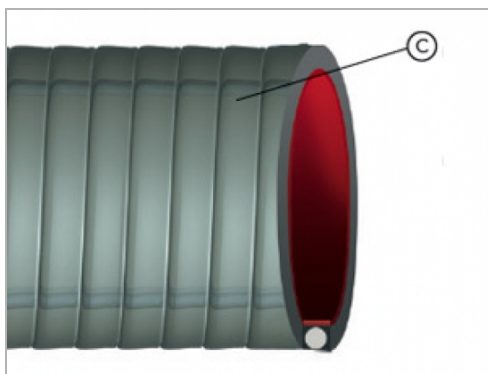

Superplastic PVC cover