


VENTILATION, FUMES AND GASSES EOLO TR FIBRE GLASS

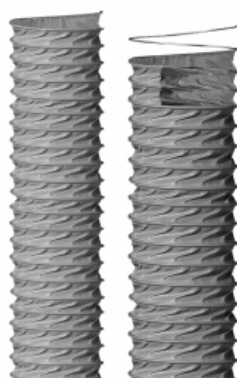

EOLO TR FIBRE GLASS

Colour: dark grey

Temperature range: -20°C +100°C (peaks 130°C)

Features: flexible duct made in **PVC coated fibre glass fabric**, flame retardant, steel helix welded between 2 fabric layers. Compressibility 8:1


Applications: Civil and naval conditioning plants, ventilation systems, suction of welding fumes, gas, vapours and dust. Sparkles resistant.

Flame retardant V(TM)-0 according to UL 94 and M1 grade according to NFP 92 503.


Technical Data

Part Number	Inside Ø	Weight	Bending radius	Roll Length	Volume
	mm	g/m	mm	m	m ³
TF 01 040.0 000.0	40	115	20	10	0,002
TF 01 051.0 000.0	51	145	26	10	0,003
TF 01 060.0 000.0	60	170	30	10	0,004
TF 01 063.0 000.0	63	175	32	10	0,005
TF 01 065.0 000.0	65	185	33	10	0,005
TF 01 070.0 000.0	70	210	35	10	0,006
TF 01 076.0 000.0	76	225	38	10	0,006
TF 01 080.0 000.0	80	230	40	10	0,007
TF 01 082.0 000.0	82	240	41	10	0,007
TF 01 090.0 000.0	90	265	45	10	0,009
TF 01 102.0 000.0	102	320	51	10	0,011
TF 01 110.0 000.0	110	345	55	10	0,013
TF 01 115.0 000.0	115	360	58	10	0,014
TF 01 120.0 000.0	120	375	60	10	0,016
TF 01 127.0 000.0	127	395	64	10	0,017
TF 01 130.0 000.0	130	405	65	10	0,018
TF 01 140.0 000.0	140	435	70	10	0,021
TF 01 152.0 000.0	152	475	76	10	0,025
TF 01 160.0 000.0	160	425	80	10	0,028
TF 01 163.0 000.0	163	430	82	10	0,029
TF 01 180.0 000.0	180	475	90	10	0,035
TF 01 203.0 000.0	203	535	102	10	0,044
TF 01 228.0 000.0	228	600	114	10	0,055
TF 01 254.0 000.0	254	795	127	10	0,068
TF 01 279.0 000.0	279	875	140	10	0,082

TF 01 305.0 000.0	305	955	153	10	0,098
TF 01 315.0 000.0	315	985	158	10	0,104
TF 01 330.0 000.0	330	1030	165	10	0,114
TF 01 356.0 000.0	356	1110	178	10	0,132
TF 01 406.0 000.0	406	1270	203	10	0,171

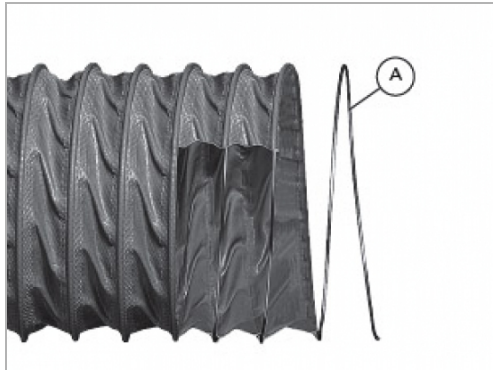

Steel helix embedded between the layers

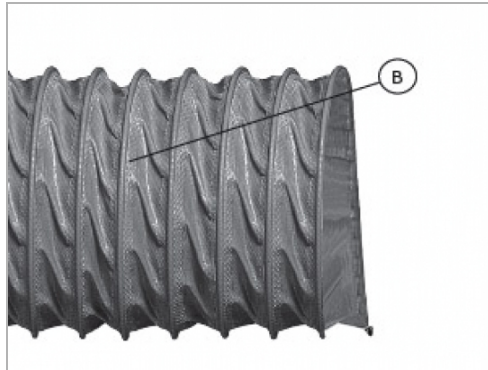

Flame retardant PVC coated fibre glass fabric

Please contact our offices for not listed sizes