

VENTILATION, FUMES AND GASSES VULCANO TPR R



VULCANO TPR-R

Colour: black


Temperature range: -40°C +125°C

Features: Santoprene® coated polyester fabric duct, reinforced by a metal wire. **More robust than vulcano tpr A, is resistant to high temperature and to most chemicals as well as to abrasion and tearing.**

Applications: hot air up to 125°C (250°F), air conditioning, exhaust gas and chemicals vapours, as a duct in the automotive industry.

Technical Data

Part Number	Inside Ø	Min. Wall Thickness	Weight	Vacuum	Bending radius	Roll Length	Volume
	mm	mm	g/m	m H ₂ O	mm	m	m ³
VX 01 040.0 000.0	40	0,45	160	2,0	40	20	0,079
VX 01 051.0 000.0	51	0,45	200	2,0	60	20	0,107
VX 01 060.0 000.0	60	0,45	235	1,7	70	20	0,137
VX 01 063.0 000.0	63	0,45	245	1,7	70	20	0,150
VX 01 070.0 000.0	70	0,45	315	1,7	80	20	0,182
VX 01 076.0 000.0	76	0,45	340	1,7	80	20	0,233
VX 01 080.0 000.0	80	0,45	355	1,6	90	20	0,254
VX 01 090.0 000.0	90	0,45	400	1,6	100	20	0,295
VX 01 102.0 000.0	102	0,45	450	1,3	110	15	0,286
VX 01 110.0 000.0	110	0,45	560	1,2	120	15	0,319
VX 01 120.0 000.0	120	0,45	610	1,0	130	15	0,370
VX 01 127.0 000.0	127	0,45	645	1,0	140	15	0,404
VX 01 130.0 000.0	130	0,45	660	0,8	140	15	0,426
VX 01 140.0 000.0	140	0,45	690	0,8	150	15	0,504
VX 01 152.0 000.0	152	0,45	750	0,8	170	15	0,544
VX 01 160.0 000.0	160	0,45	780	0,7	180	15	0,662
VX 01 180.0 000.0	180	0,45	880	0,5	200	15	0,851
VX 01 203.0 000.0	203	0,45	990	0,4	220	15	1,140
VX 01 228.0 000.0	228	0,45	1110	0,4	250	10	0,929
VX 01 254.0 000.0	254	0,45	1390	0,4	280	10	1,185
VX 01 279.0 000.0	279	0,45	1530	0,4	310	10	1,404
VX 01 305.0 000.0	305	0,45	1670	0,3	340	10	1,610
VX 01 356.0 000.0	356	0,45	1950	0,3	390	10	1,966
VX 01 406.0 000.0	406	0,45	2220	0,3	450	10	2,401

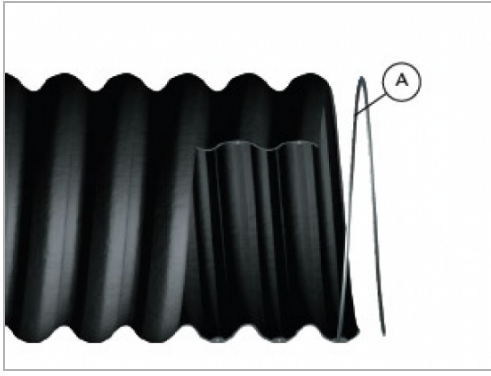

Steel helix embedded between the layers



Santoprene® coated polyester fabric

Contact our offices for not listed sizes