


VENTILATION, FUMES AND GASSES EOLO HYPALON

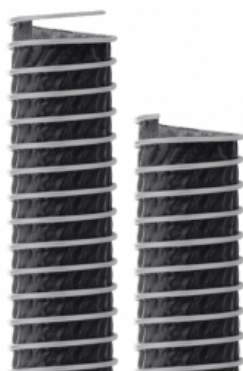

EOLO HYPALON

Colour: black

Temperature range: - 40°C +170°C


Features: Hypalon® coated polyester fabric duct reinforced by galvanized steel clamp profile. Good resistance to mineral oils, alkalis, acids and to most chemicals. Flexible and kink proof, high compressibility 4:1. **Good resistance to temperature up to 170°C.**

Application: suction and blast of dust, fibres, furnace exhaust gasses, welding smokes, engine warming.


Technical Data

Part number	Inside Ø	Outside Ø	Weight	Vacuum	Working Pressure	Bending radius	Roll Length
	mm	mm	g/m	m H2O	bar	mm	m
EY 01 038	38	50,0	570	4,50	0,805	15	6
EY 01 040	40	52,0	590	4,40	0,785	16	6
EY 01 050	50	62,0	760	3,80	0,700	19	6
EY 01 055	55	67,0	820	3,50	0,660	21	6
EY 01 060	60	72,0	890	3,20	0,630	22	6
EY 01 065	65	77,0	960	2,90	0,600	24	6
EY 01 070	70	82,0	1030	2,60	0,570	25	6
EY 01 075	75	87,0	1100	2,30	0,545	27	6
EY 01 080	80	92,0	1160	2,00	0,525	28	6
EY 01 090	90	102,0	1300	1,40	0,485	31	6
EY 01 100	100	112,0	1030	1,20	0,320	22	6
EY 01 110	110	122,0	1130	1,05	0,300	24	6
EY 01 120	120	132,0	1220	0,90	0,280	26	6
EY 01 125	125	137,0	1270	0,85	0,275	27	6
EY 01 130	130	142,0	1320	0,75	0,270	28	6
EY 01 140	140	152,0	1420	0,60	0,255	30	6
EY 01 150	150	162,0	1040	0,50	0,175	32	6
EY 01 160	160	172,0	1110	0,45	0,165	34	6
EY 01 170	170	182,0	1170	0,40	0,160	36	6
EY 01 175	175	187,0	1210	0,40	0,155	38	6
EY 01 180	180	192,0	1240	0,40	0,155	38	6
EY 01 200	200	212,0	1370	0,30	0,145	42	6
EY 01 215	215	227,0	1470	0,30	0,135	46	6
EY 01 225	225	237,0	1540	0,25	0,135	48	6
EY 01 250	250	262,0	1710	0,25	0,100	52	6
EY 01 275	275	287,0	1870	0,20	0,095	58	6

EY 01 300	300	312,0	2040	0,15	0,090	62	6
EY 01 350	350	362,0	2370	0,15	0,065	72	6
EY 01 400	400	412,0	2710	0,10	0,060	82	6
EY 01 450	450	462,0	3040	0,10	0,055	92	6
EY 01 500	500	512,0	3370	0,05	0,035	102	6
EY 01 600	600	612,0	4040	0,05	0,030	122	3
EY 01 700	700	712,0	4710	0,02	0,030	142	3
EY 01 800	800	812,0	5370	0,02	0,025	162	3
EY 01 900	900	912,0	6040	0,01	0,020	182	3
EY 01 999,9	1000	1012,0	6710	0,01	0,020	202	3

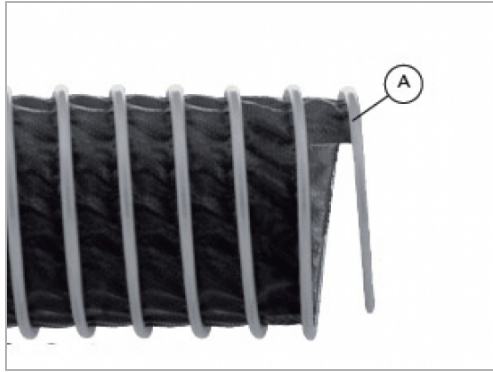

Galvanized steel clamp profile

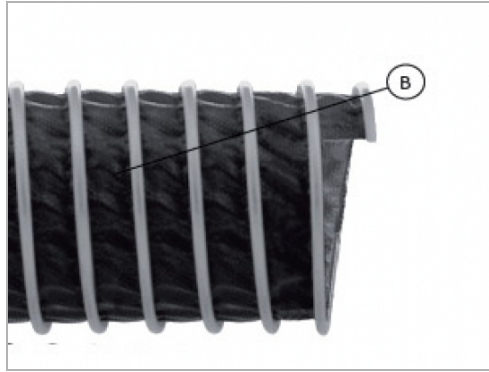

Hypalon® coated polyester fabric