

VENTILATION, FUMES AND GASSES GARAGE S



GARAGE S

Colour: black


Temperature range: - up to 200°C

Features: thermoplastic rubber duct reinforced by a **crushproof spiral**. Resistant to high temperature up to 200°C.


Applications: extraction of exhaust gas from commercial vehicles.

Technical Data

Part Number	Inside Ø	Outside Ø	Weight	Vacuum	Bending radius	Roll Length
	mm	mm	g/m	m H ₂ O	mm	m
GS 01 50	50	67	410	4,00	47	15
GS 01 51	51*	68	420	4,00	48	15
GS 01 63	63	80	510	2,80	61	15
GS 01 76	76*	93	610	1,70	65	15
GS 01 80	80	97	640	1,30	68	15
GS 01 100	100	117	780	0,50	62	15
GS 01 102	102*	119	800	0,50	63	15
GS 01 125	125	142	970	0,35	73	15
GS 01 127	127	144	980	0,35	80	15
GS 01 150	150	167	1150	0,30	97	15
GS 01 152	152	169	1160	0,30	98	15
GS 01 200	200	217	1500	0,10	132	15

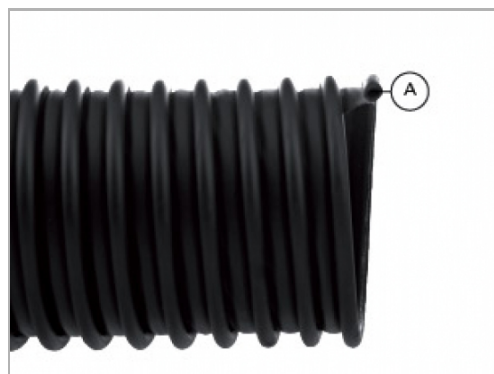

Crushproof plastic spiral

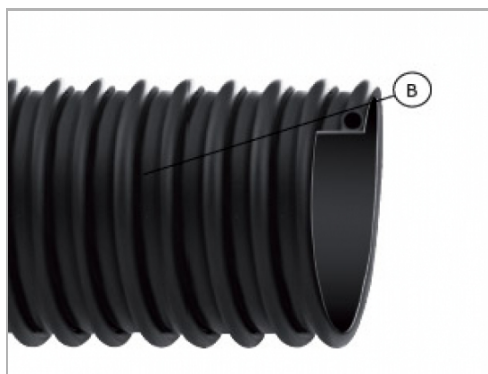

Thermoplastic rubber compound

*Available in stock