


## FOOD HOSES PLUTONE PR

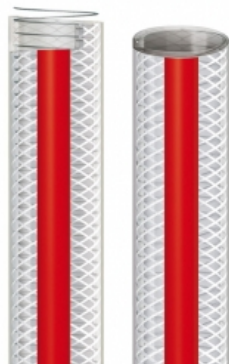

### PLUTONE PR

**Colour:** clear with steel spiral

**Temperature range:** -10°C + 60°C 14°F + 140°F


**Features:** PVC hose reinforced by steel wire and high tenacity polyester yarn. Smooth inside and outside, very flexible, resistant to weather and most chemicals.

**Application:** suction and delivery of alimentary products (no fatty foods) such as drinks, fruit juices, wine, vinegar and liqueurs up to a maximum alcoholic content of 15%. Meets EC Directives and Regulations\*. Particularly suitable for use in wineries.


\* Please contact our offices for more information

## Technical Data

Part Number	Inside Ø	Outside Ø	Weight	Working Pressure	Bursting Pressure	Vacuum	Bending Radius	Roll Length	Volume
	mm	mm	g/m	bar	bar	mH2O	mm	m	m <sup>3</sup>
PR 01 012.0 020.0	12	20	275	20	60	10	36	60	0,039
PR 01 020.0 029.6	20	29	470	18	54	10	60	60	0,106
PR 01 025.0 035.0	25	35	650	15	45	10	75	60	0,135
PR 01 032.0 043.0	32	43	880	13	39	9	96	60	0,214
PR 01 035.0 046.0	35	46	955	13	39	9	105	60	0,225
PR 01 038.0 049.0	38	49	1025	13	39	9	110	30	0,228
PR 01 040.0 052.0	40	51	1070	13	39	9	120	30	0,233
PR 01 050.0 063.0	50	63	1615	8	24	8	150	30	0,286
PR 01 060.0 074.0	60*	74	2035	7	21	8	180	30	0,363
PR 01 063.0 077.0	63*	77	2130	7	21	8	190	30	0,372
PR 01 076.0 091.0	76*	91	2660	6	18	7	230	30	0,603
PR 01 102.0 118.0	102*	118	3800	4	12	7	310	20	0,801

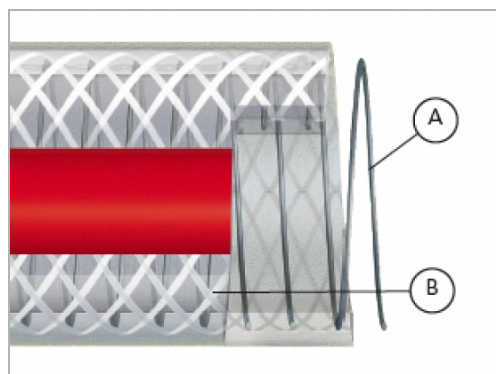

A) Harmonic steel wire  
B) Polyester high tenacity reinforcing yarn

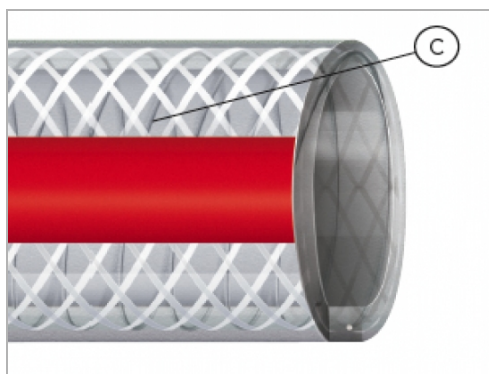

C) Food grade plasticized PVC compound

\*Available on request Other sizes are available on request